

Lithium Iron (lifePO4) Battery

ALFP-48300H(15.36KVh 300 Ah)

Features

Longer Cycle Life: Offers up to 10 times longer cycle life and five times longer float/calendar life than lead acid battery, helping it minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.


Wider Temperature Range: -20 ~ 60°C

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

Multi Protocol: The battery work well with multiple brands of inverters.



Dimension - mm

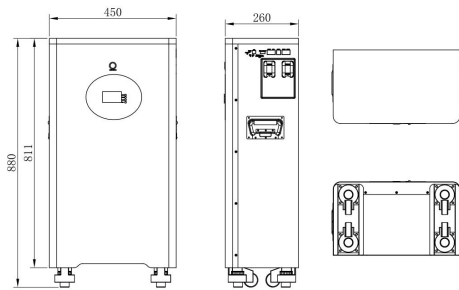


Application

- Indoor/outdoor telecom base stations
- UPS
- Household energy storage system
- Smart transportation backup power supply


Specification

Basic Parameters	Rated Voltage	51.2V
	Rated Capacity	300Ah
	Rated Energy	15360wh
	Combination Method	16S1P
	Cycle Life	≤6000 cycles @80%DOD @25 ℃
	Self Discharge	1%/months
	Efficiency of Charge	≤97%
	Efficiency of Discharge	≤98%
Charge	Charge Voltage	57.6V
	Charge Current (Recomm.)	60A
	Charge Current (Max.)	200A
Discharge	Discharge Cut-off Voltage	43.2V
	Discharge Current(Recomm.)	150A
	Pulse Current	220A (3S)
Environment	Charge Temperature	0°C to 55°C
	Discharge Temperature	-20°C to 60°C
	Humidity	5% to 95%
Physical Characteristics	IP Class	IP32
	Case Materia	Metal
	Dimensions (mm)	880*448*260mm
	Weight (kg)	119 KG
	Others(optional)	LED Screen


Different Rate Discharge Curve (25°C)

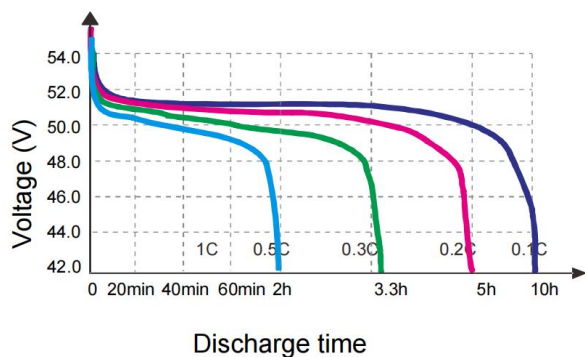


Different Temperature Discharge Curve (0.5°C)

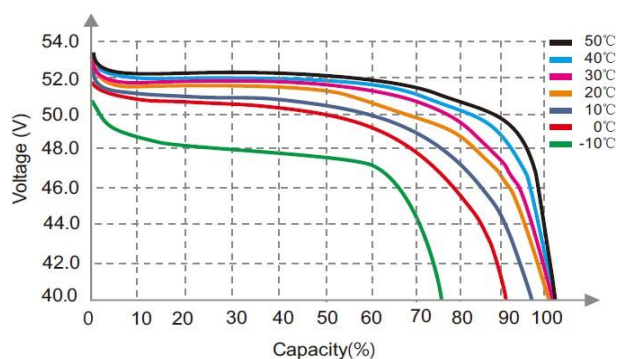


State of Charge Curve (0.5C, 25°C)

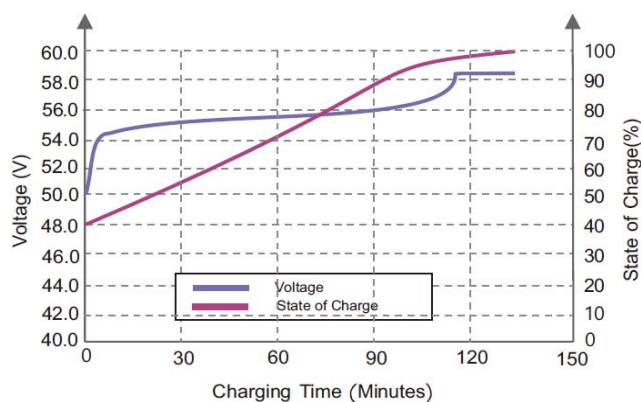

Charging Characteristics (0.5C, 25°C)

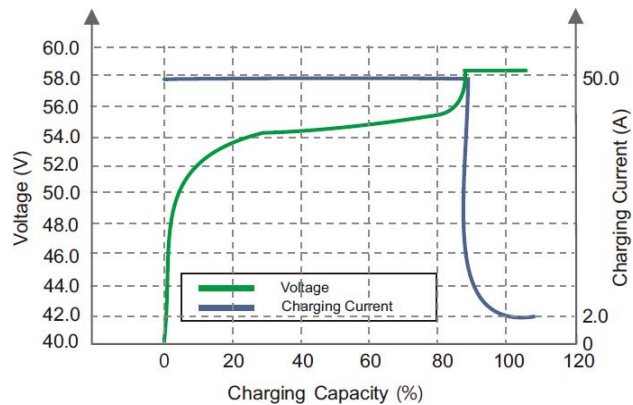

Different DOD Discharge Cycle Life Curve (0.5°C)

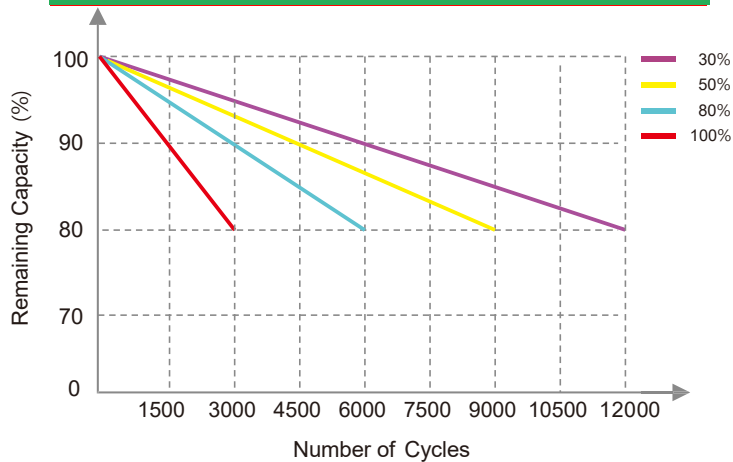

Different Temperature Self Discharge Curve

